



snake 2010 H plus

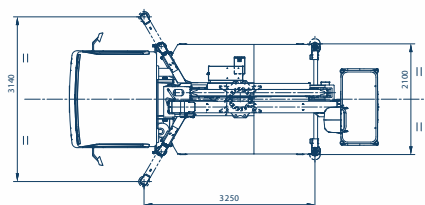




Preliminary

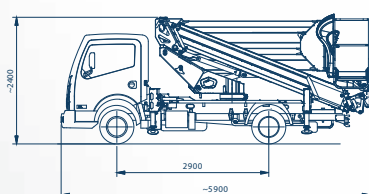

snake 2010 H plus

Stabilizzatori aperti
Open outriggers

Stabilizzatori chiusi
Closed outriggers

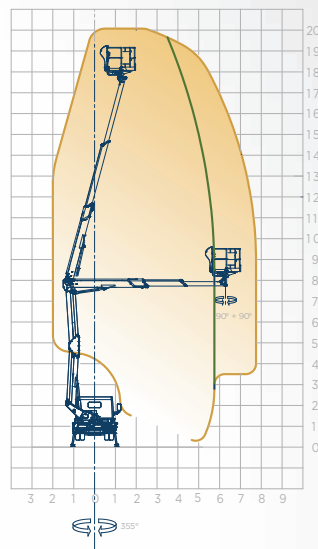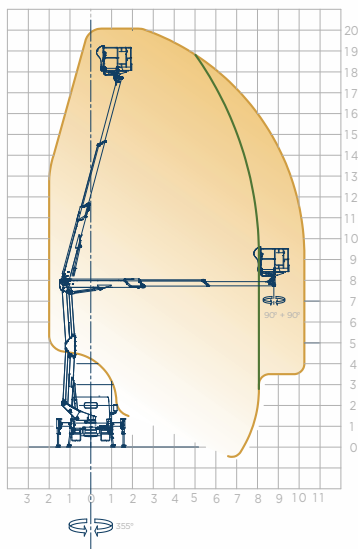

	20 m		
	18 m		90° dx + 90° sx 90° right + 90° left 90° derecha + 90° izquierda 90° droite + 90° gauche 90° re + 90° li 90° rechts + 90° links 90° направо + 90° налево
	10 m		2400 mm
	250 kg		5900 mm
	doppia barra in acciaio double bar, all steel doble barra, en acero barre double, en acier dopplebarren stahl dubbel gelaagd staal двухбалочный стальной		2100 mm
	355°		tipo ad H type H tipo H type H type H тип H
	1400x700x h1100 mm 1400x700x h1100 mm 1400x700x h1100 mm 1400x700x h1100 mm 1400x700x h1100 mm 1400x700x h1100 mm alluminio aluminium aluminio alu aluminium алюминевая		3,5 t
	RE tipo idraulici proporzionali - REL parte aerea elettroidraulici-stabilizzazione idraulica RE proportional hydraulic type - REL version, electro-hydraulic controlled aerial part-hydraulic stabilization RE tipo hidráulico proporcional - REL parte aérea electro hidráulica - estabilización hidráulica RE hydrauliques proportionnelles - REL parties aériennes électrohydrauliques - stabilisation hydraulique RE hydraulisch proportional - REL elektrohydraulisch gehobener Teil - hydraulische Stabilisierung RE porportioneel hydraulisch type - REL versie luchtdeel elektro-hydraulische bedieningen - hydraulische stabilisatie RE гидравлическое пропорциональное управление REL электрогидравлическое управление рабочим подъемным оборудованием - гидравлическое управление аутригерами		